

ID NUMBER	
PREPARATION	17-02-14

LDS1.5

SPECIFICATIONS

MODEL : HLS-LFCD2




1. Basic Performance Specification

Items	Specifications
Operating supply voltage*	5VDC $\pm$ 5%
Light source	Semiconductor Laser Diode(λ =785nm)
Laser safety	IEC60825-1 Class 1
Current consumption	400mA or less (Rush current 1A)
Detection distance	120mm ~ 3,500mm
Interface	3.3V USART (230,400 bps) 42bytes per 6 degrees, Full Duplex option.
Ambient Light Resistance	10,000 lux or less
Sampling Rate	1.8kHz
Dimensions	69.5(W) X 95.5(D) X 39.5(H)mm
Mass	Under 125g

* Target : white paper (Lambertian reflectance $\geq$ 80%)

2. Standard Performance


Measurement performance		
Items	Spec.	Remarks
(1) Distance		White objects - Lambertian Reflectance ≥80%
Distance Range	120 ~ 3,500mm	
Distance Accuracy *		
120mm ~ 499mm	±15mm	
500mm ~ 3,500mm	±5.0%	
Distance Precision **		
120mm ~ 499mm	(±)10mm	
500mm ~ 3,500mm	(±) 3.5%	
(2) Rotation		
Scan Rate	300±10 rpm	
Angular Range	360°	
Angular Resolution	1°	

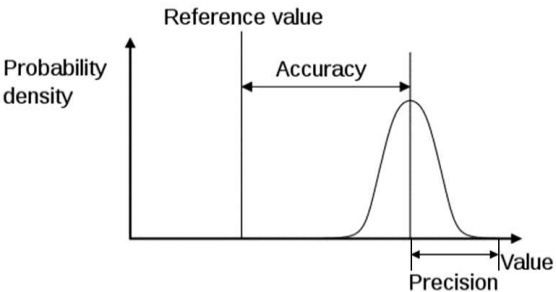


* Accuracy = Distance Average – Reference Value

** Precision = $\frac{Max. - Min.}{2}$

3. Mechanism Layout

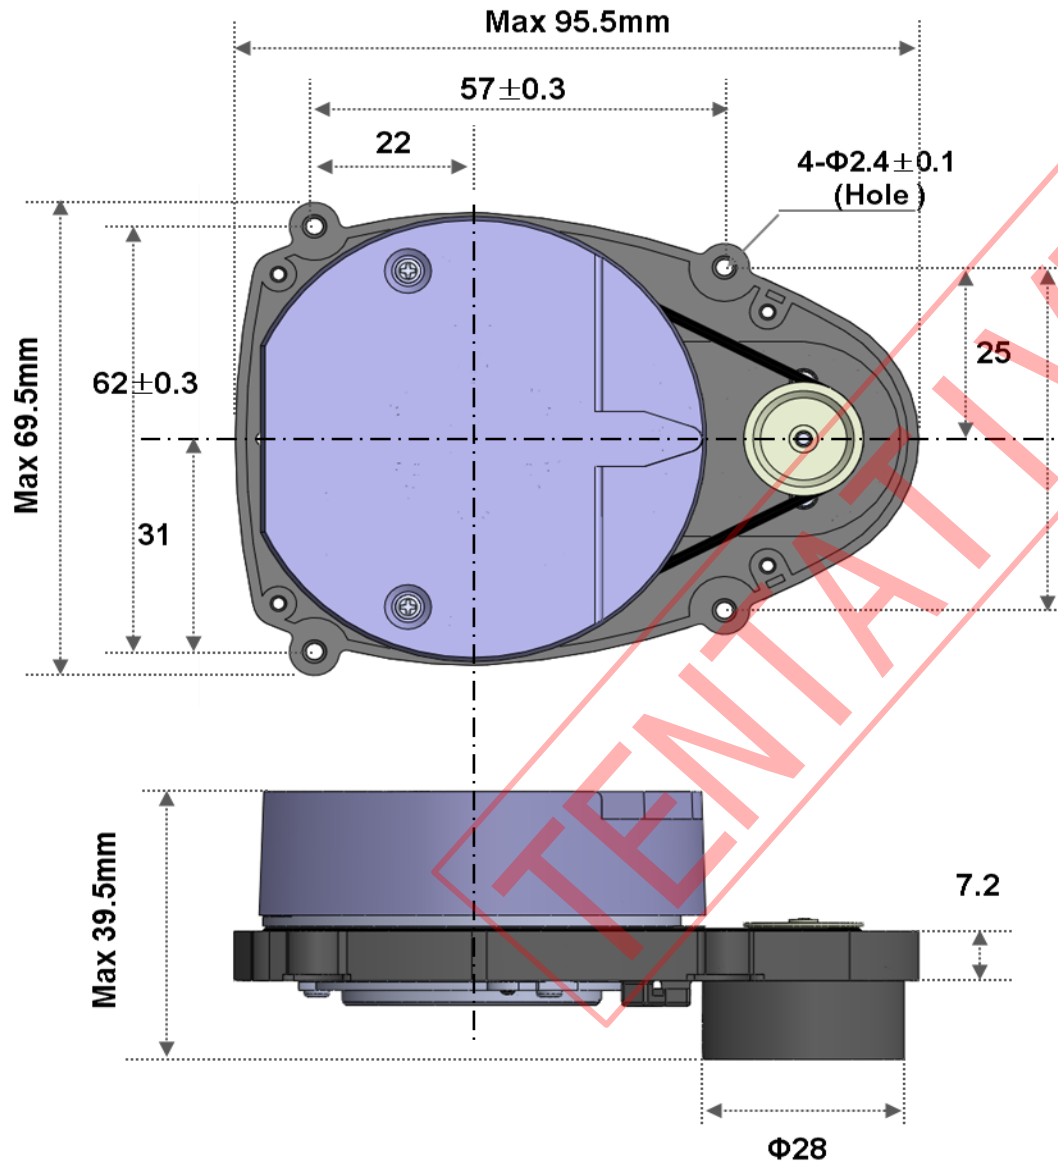


DIM GRADE	DIMENSIONAL TOLERANCE						
	4	5	13	37	111	331	1000
(1)	± 0.10	± 0.15	± 0.20	± 0.30	± 0.45	± 0.70	± 1.0
2	± 0.15	± 0.20	± 0.30	± 0.45	± 0.70	± 1.0	± 1.5
3	± 0.20	± 0.30	± 0.45	± 0.70	± 1.0	± 1.5	± 2.0
4	± 0.30	± 0.45	± 0.70	± 1.0	± 1.5	± 2.0	± 3.0
5	± 0.45	± 0.70	± 1.0	± 1.5	± 2.0	± 3.0	± 4.0

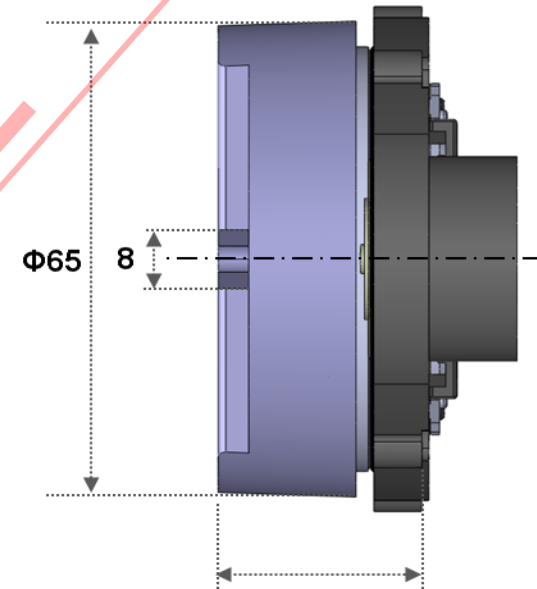

MAX : 27.1mm
Typical : 26.9mm

Bottom line of boss
for robot cleaner(Origin line)

4. Optical Path (9.4mm)

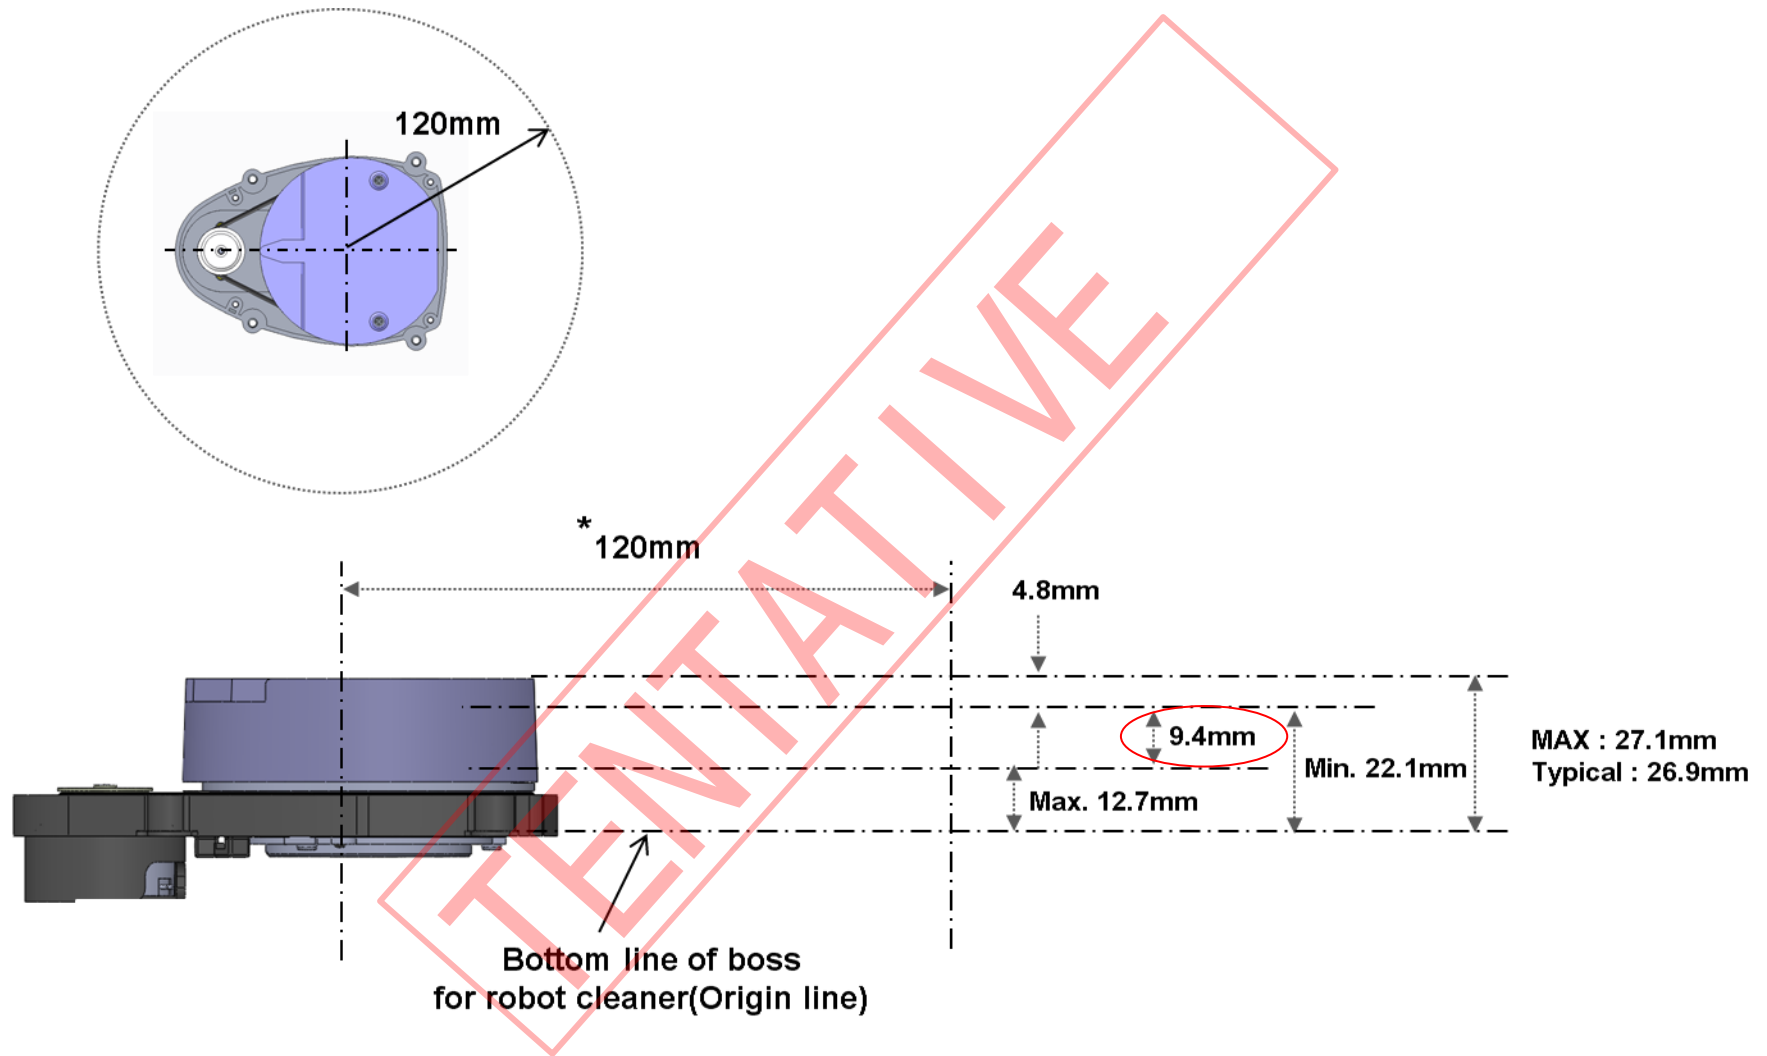

* If the position is different, please contact HLDS about the exact dimension.

5. DATA INFORMATION

0	sync	FA	Fix	
1	degree	A1	Angle Index	0xA0~0xDB (0~60)
2	RPM	C3	RPM	low
3		0B		high
4	Intensity	B0	Angle offset 0	low
5		22		high
6	Dist_M	8B		low
7		00		high
8	Reserved*	00		low
9		00		high
10	Intensity	2C	Angle offset 1	low
11		30		high
12	Dist_M	89		low
13		00		high
14	Reserved*	00		low
15		00		high
16	Intensity	42	Angle offset 2	low
17		27		high
18	Dist_M	8A		low
19		00		high
20	Reserved*	00		low
21		00		high
22	Intensity	3C	Angle offset 3	low
23		21		high
24	Dist_M	8C		low
25		00		high
26	Reserved*	00		low
27		00		high
28	Intensity	C6	Angle offset 4	low
29		0E		high
30	Dist_M	98		low
31		00		high
32	Reserved*	00		low
33		00		high
34	Intensity	3F	Angle offset 5	low
35		16		high
36	Dist_M	A4		low
37		00		high
38	Reserved*	00		low
39		00		high
40	Checksum	13		low
41		13		high

1) angle = angle index*6 + angle offset

2) checksum information:

add all data 40bytes → checksum = 0xFF – checksum → save to 40, 41bytes
(If calculated checksum is same with 40byte or 41byte, all data is valid.)

* This is reserved for compatibility

6. Pin Description & Command

• LDS 6-pin

No.	Pin Name	Signal Description
6	Vcc(+5.0V)	Power supply for LDS core
5	TX	Serial output for host
4	PWM	LDS motor control PWM signal
3	GND	Ground
2	RX	Input signal for LDS operation
1	BOOT0	Boot mode pin for update F/W (Used only HLDS)

• Motor 2-pin

No.	Pin Name	Signal Description
2	Vcc(+5.0V)	Power supply for LDS Spindle motor
1	PWM	LDS motor control PWM signal


* Host circuit needs internal connections as above

• Command

Key	Description
b	Begin operation (motor state & sensor)
e	Pause operation

7-1 RECOMMENDED CONNECTOR(LDS – 6Pin)

Pin	Model No.	Dimensions(mm)		
	TOP entry type	A	B	C
6	11257W00-NP-S	6.25	10.75	6.70

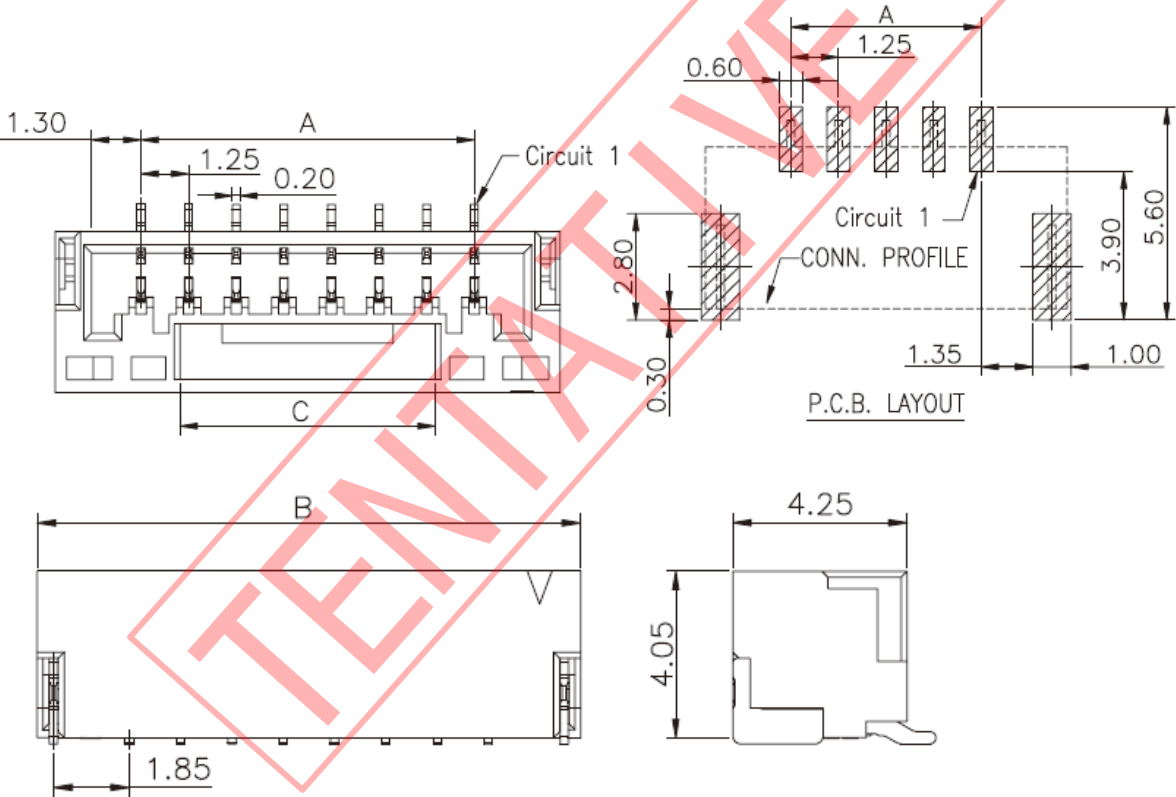

7-2 RECOMMENDED CONNECTOR(Motor – 2Pin)

Pin	Model No.	Dimensions(mm)			
	TOP entry type	A	B	C	D
2	SMW200-H02G	8.0	4.7	2.0	2.9

